



Ideal for the meeting and huddle rooms, the affordable Epson EB-05/40 projector series is multi-functional, packed with features and the perfect choice to present true-to-life images. Captivating presentations are now possible with stunning colour and white brightness of up to 3,600 lumens to ensure crystal clear images. The intuitive home screen puts all commonly used functions together for easy selection. With your convenience in mind, Epson allows you to project your content wirelessly from compatible smart devices without any software installation.









Horizontal





Wireless Projection w/o Software\*



Environmentally Friendly



FR-S05/X05/W05



EB-S41/X41/W41/U42



### **ENGINEERED FOR BUSINESS**

### **User-Friendly Features**

Designed with the user in mind, the horizontal keystone adjuster and a front facing exhaust ensure a seamless and comfortable experience.

### Connect and Project with Ease

The in-built Wi-Fi\* and Epson iProjection  $^{\text{TM}}$ application enable files and images to be projected directly from your smart devices.

### Cost Savings All Round


Lamps and filters can last up to 10,000 hours in eco-mode and are easy to replace even when projector is mounted on the ceiling.









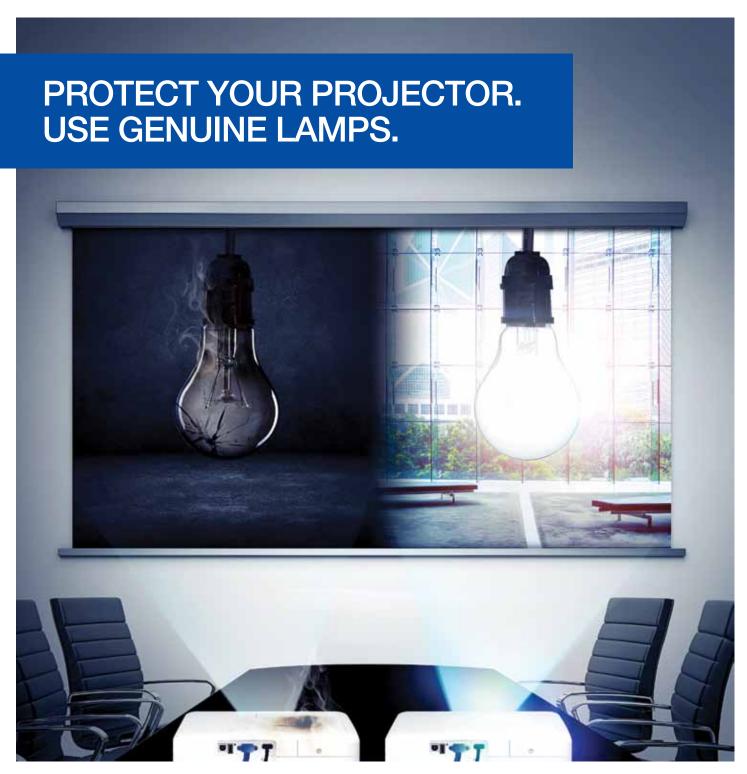

Don't compromise on safety – use Epson genuine lamps to avoid damaging your projector. Eliminate the risk of melting parts of your projector, as well as breaks that result in high-voltage shutdown. With a 0% failure rate even after 2,000 hours of usage – compared to 70% in non-genuine lamps – Epson genuine lamps are safer and more reliable. Choose the best possible viewing experience filled with long-lasting sharpness and colour in every projected image with Epson.





### **GENUINE EPSON LABEL**

To ensure the best quality and safety when using your Epson Projector, look for the "Genuine EPSON Colour Shifting Label" on your projector lamp. Real quality and value, only with Epson genuine supplies.

### DANGERS OF NON-GENUINE LAMPS



### **UNRELIABLE**

Counterfeit lamps deteriorate and break much faster than genuine ones.




### UNSAFE

Parts of your Epson projector such as the housing or wires may melt, disconnect, or become damaged when using non-genuine lamps.



### POOR IMAGE QUALITY

Counterfeit lamps may result in inaccurate colour projection, lower brightness levels, as well as flickering images that spoil your viewing experience.

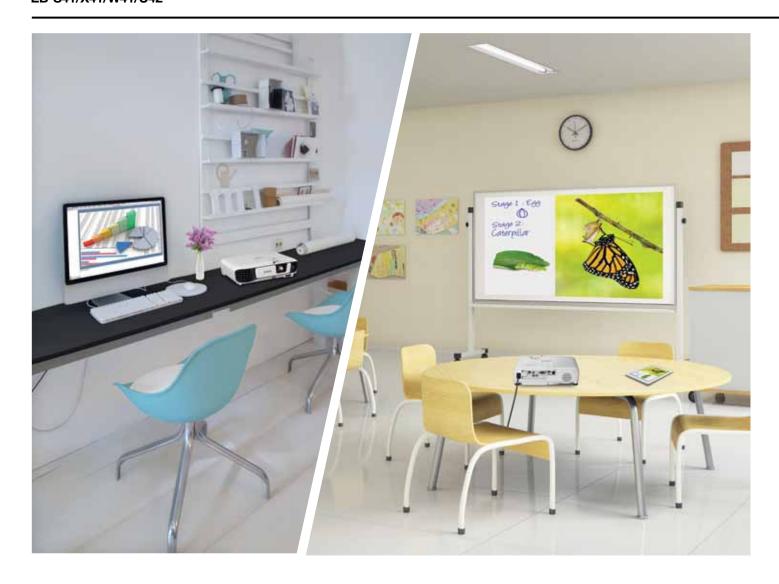


### **User-friendly Features**

### **Horizontal Keystone Adjuster**

Deliver powerful presentations anywhere in the room. With the easy-to-use sliding Horizontal Keystone Adjuster, screen corrections can be done quickly, easily and accurately, even in a limited space.

With automatic vertical keystone detection and adjustment, there is no longer any need for awkward and time-consuming manual image adjustments that interrupt the smooth flow of your presentation delivery. This handy feature automatically detects the projector's vertical keystone distortion and corrects it instantly.

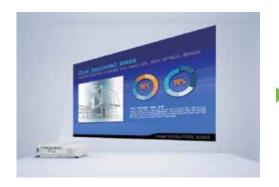





### **Home Screen**

View and access your most frequently used functions immediately on the home screen. See all source information at a glance, no matter what the source input. With all the information you need right there on the home screen, wireless connections have never been easier.



### **Auto Power On**

With the auto power on function, projection starts automatically once a projection signal is detected via VGA cable or USB cable, providing you with an easy and hassle-free presentation.



### **Auto Source Search**

With automatic detection of the input source, projection automatically begins without you having to manually switch the input.








### **Redirected Exhaust**

The front-facing exhaust is intelligently positioned to prevent anyone from being exposed to the hot exhaust, especially when on a narrow table. This allows your audience to fully concentrate on the presentation, even if they are seated beside or behind the projector.

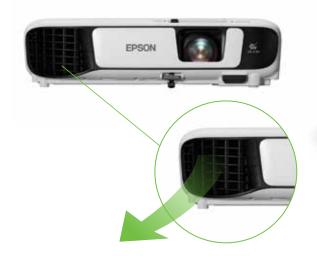





Other projectors with side exhaust

### Seamless Connectivity and Usability

### Wide-ranging Connectivity

Advanced connectivity features mean convenient and hassle-free projections for your presentations. With a wide-ranging interface, you can choose from a variety of connection methods including HDMI, VGA and LAN. In addition, the EB-U42 is equipped with two HDMI ports, one of which is MHL-enabled, for greater digital compatibility.

Simply connect your MHL-compatible device with the MHL cable to fully enjoy your contents on the big screen. What's more, when connected, you can charge your smart device and operate it using the projector's remote control.







\* Applicable for EB-U42 only.

### **Wireless Transmission**

Enjoy enhanced connectivity and flexibility with in-built Wi-Fi\* connectivity. Easily share and transmit images, texts and files from your smart devices using the "Epson iProjection" application for smooth and smart projections.



\* Applicable for EB-U42 only. For other models, wireless LAN adaptor ELPAP10 is required.

### Split Screen\*

Display images from two different sources side by side on the same screen for a more effective presentation. In video conferences, for example, images of presentation materials and remote participants can be shown simultaneously.



<sup>\*</sup> Applicable for EB-W05/W41/U42 only.

### **Epson iProjection\***

The iProjection application enables a wireless connection for projecting images and files from your smart devices. The "QR Code Reader" function makes this wireless connection even easier by simply reading the QR code that is projected on the screen from your smart devices.



In iProjection, projector profile search, multi-screen display, distribution function, audio transfer, movie file transfer, interrupt connection disabling and encryption data transfer capabilities are not supported.





Open the iProjection in your smart device

Scan the QR code on the projection screen

Project the contents from your smart device wirelessly on the projection screen

### **Multi-PC Projection Moderator Function**

With the control of a host PC, up to 50 terminals can be connected via the multi-PC projection to a single projector. The host PC acts as a moderator, selecting media from up to four PCS or smart devices to be projected simultaneously. With the moderator function, you can maintain control and prevent tampering of what's projected on screen.



### **Convenient Wireless Mirroring Projection\***

Project contents wirelessly from compatible smart devices and laptops without any software installation with the Miracast. The technology enables easy wireless transmission of Full HD video and sound from PCs and smart devices, eliminating the hassle of a physical connection and eradicating issues with setting up. With support for screen mirroring\*\*, projecting your tablet and laptop screens has never been easier.



- \* Applicable for EB-U42 only.
- \*\* If the Miracast function is activated, other network features will be disabled.

### **Essential Cost-savings**

### **Longer Lamp Life**

With a long lamp life of 10,000 hours in eco-mode, the frequency of costly lamp replacements is reduced, saving you time and money.



### **Easy Lamp Replacement**

With the lamp cap located on the upper side of the projector, you can change lamps easily even if the projector is installed on the ceiling. Lamps can be replaced quickly without tools and dismounting of the projector from the ceiling mount.





### **Eco Features**

- Uses just 0.2W of power in standby mode
- Projector optics employ lead-free lenses
- Unpainted plastic housing reduces the environment impact
- The flame retardants used in the plastic housing do not contain chlorine or bromine

### Air Filter

With a maintenance cycle of 10,000 hours in eco-mode, the need for regular maintenance of the air filter is minimised to save you time and money.

### Better Products for a Better Future\*

For more information on Epson's environmental programmes, visit http://global.epson.com/SR/environment.

### Impressive Image Quality

### Incredible Beyond Full HD Resolution\*

Deliver a dynamic viewing experience with WUXGA 1920 x 1200 resolution image display without distortion in Video, Blu-ray and other graphic intensive media. The projection images remain razor sharp and vivid, even on larger screens.



### High Contrast Ratio

Add brilliance to your presentations. Boasting stunning brightness of up to 3,600 lumens and a high contrast ratio of 15000:1, these projectors enable you to project beautiful, well-defined images wherever you are, regardless of ambient light.



### PARTNERS IN PERFECTION

### Wireless LAN Adaptor ELPAP10



Supports 802.11 b/g/n connection Compatible with all Epson wireless-enabled projectors

### **Desktop Document Camera ELPDC21**



2.6kg2 megapixels with 30 fps12 x optical zoom1080p output resolutionHDMI digital connectivity

### Ink Tank System Printer L385



Multifunction printer (print, copy, scan)
Each set of ink bottles delivers ultra-highyield of 7,500 for colour and 4,500 pages for black

In-built Wi-Fi and Epson Connect Print speed: Approx. 10ipm for default black and white prints Resolution: 5760 x 1440dpi

<sup>\*</sup> Applicable for EB-U42 only.



# **BIGGER PROJECTION. BRIGHTER FUTURE.**

"More than half of the students are unable to read certain contents displayed on a 70" flat panel display."

- Radius Research.



58% of students from US, 61% from UK, and 57% from Singapore are unable to read contents on a 70-inch flat panel display\*. This is why we've built projectors that depict larger and more immersive pictures, so that you can fully engage your audience and maximise every learning experience with exquisite detail and vibrancy. By not downsizing classroom displays to flat panels—you ensure the brightest minds of our future are not hindered by contents displayed too small and unreadable. Experience the real practical difference today.













**Epson Projector** 

Flat Panel Display



70"



100"

# EPSON REVOLUTIONISES PROJECTOR MARKET WITH 3LCD TECHNOLOGY AND LEADS AS WORLD'S NO.1\* PROJECTOR BRAND FOR 14 CONSECUTIVE YEARS!

\* Based on independent research by Futuresource Consulting


### **Advantages of 3LCD Projection System**

### **Bright Images and Faithful Colour Reproduction**

3LCD projectors offer all-time colour (Red, Green and Blue) projection thereby ensuring faithful full colour reproduction. This is suitable for projection of colour intensive images such as videos, photographs and colour charts.

### **Incredible Details**

3LCD projectors are able to produce an unparalleled range of grayscale images, which contributes to delivering incredible colour images that are smooth and seamless.

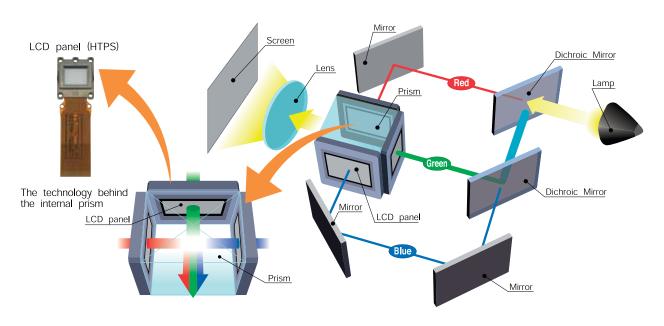

3LCD projector: RGB are projected at the same time, which makes the single composite image easy on the eyes.



\*\* HTPS (High Temperature Poly-Silicon) is an active matrix transmissive LCD. It is extremely small and produces high-quality images.

### **Gentle on the Eyes**

3LCD projectors' images do not suffer from colour break-up (commonly known as the rainbow effect). The projections are easy on the eyes as you will not be affected by any distorted pattern.

3LCD projectors use 3 separate LCD panels to form a continuous image containing all colours (red, blue and green) ensuring smooth video playback, even for rapid-motion images.

### **Reliable Technology**

With more than 70 million 3LCD chips shipped to date, the powerful and road-tested 3LCD projection technology is extremely reliable, and is trusted by many throughout to deliver sharp and true-to-life images.



## SEE VIBRANT, REALISTIC COLOURS WITH HIGH COLOUR BRIGHTNESS.




See colours like never before. Epson 3LCD projectors deliver brilliant colours that match its white brightness to give you balanced, realistic, and vibrant images. It's no wonder Epson projectors are the people's preferred choice.



### Up to 3X Wider Colour Gamut

Colour gamut refers to the range of colours that can be reproduced by a display device - the wider the gamut, the more realistic it is. Epson 3LCD projectors project three times wider gamut that matches closely to the original standard of a display device (sRGB), as compared to 1-chip projectors.

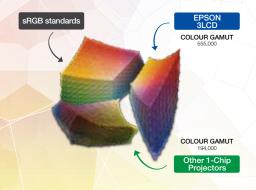

Comparing the yellow corners among the three gamuts, 1-chip projectors have a distinctly darker and smaller set of colours which are not as vibrant as Epson 3LCD projectors.



### **Up to 3X Brighter Colours**

Epson 3LCD projectors deliver up to three times the colour brightness, effortlessly creating the same colour and white brightness, resulting in faithful images with superior colour balance.





### No Rainbow Effect

With 1-chip projectors, the spinning motion of the sequential colour wheels tend to cause colours to break out into distinct red, green and blue. Called the rainbow effect, this may cause users to suffer headaches with prolonged viewing. Epson projectors do not give out this effect, giving users a comfortable experience.





www.3lcd.com



MODEL NUMBER Projection Technology		EB-U42	EB-W41	EB-W05		
		RGB liquid crystal shutter projection system	m			
Specifications o						
LCD	Size	0.67" (D10)	0.59" (D9)			
	Native Resolution	WUXGA	WXGA			
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)				
	F-Number	1.50 - 1.71	1.49 - 1.72			
	Focal Length	20.42 - 24.50 mm	16.9 - 20.28 mm			
	Zoom Ratio	1-1.2				
	Throw Ratio	1.38 - 1.68 (Wide - Tele)	1.30 - 1.56 (Wide - Tele)			
Lamp	Type	210W UHE				
Life (Normal / Eco)*1		6,000 hours / 10,000 hours				
Screen Size (Pro	jected Distance)	· · · · · · · · · · · · · · · · · · ·				
Zoom: Wide	•	30" - 300" [0.87 - 9.02 m]	33" - 320" [0.91 - 9.07 m]			
Zoom: Tele		30" - 300" [1.07 - 10.98m]	33" - 320" [1.10 - 10.89 m]			
Standard Size		60" screen 1.8 - 2.17 m	60" screen 1.68 - 2.02 m			
Brightness*2						
•	t (Normal / Eco)	3,600lm / 2,235lm		3,300lm / 2,050lm		
White Light Output (Normal / Eco) Colour Light Output		3,600lm		3,300lm		
• •		15,000:1		0,000111		
Contrast Ratio Internal Speaker(s)		10,000.1				
Sound Output	(4)	2W Mono				
Geometric Corre	ection	Z44 MIOLIO				
	Vertical / Horizontal	±30°/±30°				
Keystone Auto Keystone Co						
-		Yes (Vertical only)				
	eystone Correction	Yes				
Quick Corner		Yes				
Connectivity	0.01.45	4 (7)				
Analog Input	D-Sub 15pin	1 (Blue molding)				
	Composite	RCA x 1 (Yellow)	1	1		
Digital Input	HDMI	2 (1 supports MHL)	1 (MHL supported)	1 (MHL not supported)		
Audio Input	2 RCA (White / Red)	1	1			
USB Interface	USB Type A	1 (for USB Memory,	1 (for USB Memory, USB Documer	nt Camera, for Wireless LAN Unit		
		USB Document Camera, Firmware Update)	Firmware Update)			
	USB Type B	1 (for USB Display, Mouse, K/B, Control, F				
Network	Wireless	Yes (Built-in)	Yes (Optional)			
	cations (Miracast)	100 (Ball III)	100 (Optiona)			
Supported Speed For Each Mode <sup>3</sup>		IEEE 802.11g (2.4GHz): 54 Mbps IEEE 802.11n (2.4GHz): 130 Mbps IEEE 802.11a (5GHz): 54 Mbps IEEE 802.11n (5GHz): 270 Mbps IEEE 802.11ac (5GHz): 780 Mbps	N/A			
Wireless LAN Sec	urity	WPA2-PSK(AES)	N/A			
Supported Conne	=	Wi-Fi Direct	N/A			
	cations (Wireless LAN	)	<u> </u>			
Supported Speed For Each Mode <sup>3</sup>		IEEE 802.11b (2.4GHz): 11 Mbps IEEE 802.11g (2.4GHz): 54 Mbps IEEE 802.11n (2.4GHz): 65 Mbps IEEE 802.11a (5GHz): 54 Mbps IEEE 802.11n (5GHz): 65 Mbps	IEEE 802.11b (2.4GHz): 11 Mbps IEEE 802.11g (2.4GHz): 54 Mbps IEEE 802.11n (2.4GHz): 130 Mbps			
Wireless LAN Security		Quick Mode: WPA2-PSK, Advanced Mod	le: WPA/WPA2-PSK			
Supported Conne	=	Infrastructure, Access Point				
Operating Temperature		5 - 35 °C <41 - 95 °F> (0m / 0ft - 2,286m / 7,500ft) 5 - 30 °C <41 - 86 °F> (over 2,286m / 7,500ft) (20% - 80% humidity, No condensation)				
Operating Altitude		0 - 3,000 m <0 - 9,843 ft> (over 1,500m / 4,921ft: with high altitude mode)				
Direct Power On	/ Off	Yes				
Start-Up Period		About 6 seconds, Warm-up Period: 30 seconds				
Cool Down Perio	od	Instant Off				
Air Filter						
Maintenance Cycl	e (Normal / Eco) *4	6,000 hours / 10,000 hours				
Power Supply Vo		100 - 240 V AC ±10%, 50/60 Hz				
	otion (220 - 240V)					
Lamp On (Normal		298W / 219W	282W / 203W			
		2.2W / 0.2W	2.0W / 0.2W			
Standby (Network On / Off)  Dimension Evaluding Foot (D X W X H)			234 x 302 x 77 mm			
Dimension Excluding Feet (D X W X H) Weight		Approx 2.8kg	Approx 2.5kg			
Fan Noise (Norm	nal / Eco)	37dB / 28dB	- I pprox clory			
an Noise (Norm	iai / ECO)	01UD/20UD				

- 1 Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time
- <sup>2</sup> Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.
- Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors.
- When used in the general office environment (the amount of floating dust: 0.04 0.2 mg/m²). Based on the Epson's in-house test results.

### **EPSON INDIA PVT. LTD.**

12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore - 560 008. Tel: 080 4566 5000 Fax: 080 4566 5005

### **Regional Offices:**

Ahmedabad - 3314 8500/01, Chennai - 3967 7500, Cochin - 4012 315, Coimbatore - 98942 19200, Hyderabad - 4857 0032, Jaipur - 78699 11699, Kolkata - 4603 4714/15/29/30, Mumbai - 3079 8200, New Delhi - 3312 0300, Pune - 3028 6000/05





**Epson Helpline:** For product info or service - 1800 425 0011. For service - 1800 123 001 600 (9AM - 6PM) (Mon - Sat)

Email: emp@eid.epson.co.in

Computer Cable (VGA Cable): 1.8m USB Cable: 1.8m Remote Control: Yes, with Battery AA x 2

Soft Carrying Case

Supplied Accessories Power Cable: 1.8m

Wireless LAN Unit with Screw: Built in (EB-U42) Cover for ELPAP10: Yes (except EB-U42)

### **Optional Accessories**

Spare Lamp: ELPLP96 Air Filter: ELPAF32

Wireless LAN: ELPAP10 (EB-W41, EB-W05)

Soft Carrying Case: ELPKS69

Ceiling Mount (White Colour): ELPMB23

#### EB-U42



#### FB-W41 / FB-W05



©2017 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Information correct as at January 2018

Official Team Partner







Dealer's Stamp

### EB-X41/X05/S41/S05



	MODEL NUMBER		EB-X05	EB-S41	EB-S05	
Projection Technology		RGB liquid crystal shutte	er projection system	-		
Specifications of	f Main Parts					
LCD	Size	0.55" (D10)		0.55" (D7)		
	Native Resolution	XGA		SVGA		
Projection Lens	Type	Optical Zoom (Manual) / Focus (Manual)		No Optical Zoom / Foo	No Optical Zoom / Focus (Manual)	
	F-Number	1.49 - 1.72		1.44		
	Focal Length	16.9 - 20.28 mm		16.7mm		
	Zoom Ratio	1 - 1.2		1.0 - 1.35 (Digital Zoom)		
	Throw Ratio	1.48 - 1.77 (Wide - Tele)		1.45 - 1.96 (Wide - Tele)		
Lamp	Type	210W UHE				
Life (Normal / Eco) <sup>-1</sup>		6,000 hours / 10,000 hours				
Screen Size (Pro	jected Distance)					
Zoom: Wide		30" - 300" [0.89 - 9.12 m]   30" - 350" [0.88 - 10.44 m]				
Zoom: Tele		30" - 300" [1.07 - 10.95 m]		23" - 260" [0.88 - 10.44 m]		
Standard Size		60" screen 1.8 - 2.17 m		60" screen 1.77 - 2.4 m		
Brightness*2					•	
White Light Outpu	t (Normal / Fco)	3,600lm / 2,235lm	3,300lm / 2,050lm		3,200lm / 1,985lm	
Colour Light Output		3,600lm	3,300lm		3,200lm	
Contrast Ratio		15,000:1				
Internal Speaker	r(s)					
Sound Output	.,	2W Mono				
Geometric Corre	ection					
Keystone	Vertical / Horizontal	±30°/±30°				
Auto Keystone Co		Yes (Vertical only)				
-		Yes				
Horizontal Slide Keystone Correction  Quick Corner		Yes				
Connectivity						
Analog Input D-Sub 15pin		1 (Blue molding)				
	Composite	RCA x 1 (Yellow)				
Digital Input	HDMI	1 (MHL not supported)				
Audio Input	2 RCA (White / Red)	1				
USB Interface	USB Type A	1 (for USB Memony, USB Document Camera, for Wireless LAN Unit, Firmware Update)				
	USB Type B	1 (for USB Display, Mouse, K/B, Control, Firmware Update)				
		-				
Network	Wireless	Yes (Optional)				
	Wireless cations (Wireless LAN)	Yes (Optional)				
Wireless Specific	cations (Wireless LAN)		11 Mbps			
Wireless Specific	cations (Wireless LAN)		· ·			
Wireless Specific Supported Speed	cations (Wireless LAN) For Each Mode <sup>*3</sup>	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz):	54 Mbps 130 Mbps			
Wireless Specific Supported Speed	cations (Wireless LAN) For Each Mode <sup>*3</sup>	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz):	54 Mbps	/PA2-PSK		
Wireless Specific Supported Speed Wireless LAN Sec	cations (Wireless LAN) For Each Mode <sup>3</sup> urity	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, Access Po	54 Mbps 130 Mbps K, Advanced Mode: WPA/W toint			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne	cations (Wireless LAN) For Each Mode <sup>3</sup> urity  ction Mode	IEEE 802.11b (2.4GHz); IEEE 802.11g (2.4GHz); IEEE 802.11n (2.4GHz); Quick Mode: WPA2-PSI Infrastructure, Access Po 5 - 35 °C <41 - 95 °F> (	54 Mbps 130 Mbps K, Advanced Mode: WPA/W toint (0m / 0ft - 2,286m / 7,500ft)			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne	cations (Wireless LAN) For Each Mode <sup>3</sup> urity  ction Mode	IEEE 802.11b (2.4GHz); IEEE 802.11g (2.4GHz); IEEE 802.11n (2.4GHz); Quick Mode: WPA2-PSI Infrastructure, Access Pi 5 - 35 °C <41 - 95 °F> ( 5 - 30 °C <41 - 86 °F> (	54 Mbps 130 Mbps K, Advanced Mode: WPA/M toint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft)			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempore	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature	IEEE 802.11b (2.4GHz); IEEE 802.11g (2.4GHz); IEEE 802.11n (2.4GHz); Quick Mode: WPA2-PSI Infrastructure, Access Pr 5 - 35 °C <41 - 95 °F> ( 5 - 30 °C <41 - 86 °F> ( (20% - 80% humidity, N	54 Mbps 130 Mbps K, Advanced Mode: WPA/M foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation)			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempore Operating Altitud	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature	IEEE 802.11b (2.4GHz); IEEE 802.11g (2.4GHz); IEEE 802.11n (2.4GHz); Quick Mode: WPA2-PSI Infrastructure, Access Pr 5 - 35 °C <41 - 95 °F> ( 20% - 80% humidity, N 0 - 3,000 m <0 - 9,843	54 Mbps 130 Mbps K, Advanced Mode: WPA/M toint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft)			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Temporating Altitud Direct Power On	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, Access Pr 5 - 35 °C <41 - 95 °F> ( 5 - 30 °C <41 - 86 °F> ( 20% - 80% humidity, N 0 - 3,000 m <0 - 9,843 1	54 Mbps 130 Mbps K, Advanced Mode: WPA/M toint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft; v			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempor Operating Altitut Direct Power On Start-Up Period	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature	IEEE 802.11b (2.4GHz); IEEE 802.11g (2.4GHz); IEEE 802.11n (2.4GHz); IEEE 802.11n (2.4GHz); Quick Mode: WPA2-PSI Infrastructure, Access Pt 5 - 35 °C <41 - 95 °F> ( 5 - 30 °C <41 - 86 °F> ( 20% - 80% humidity, N) 0 - 3,000 m <0 - 9,843 ; Yes About 6 seconds, Warm	54 Mbps 130 Mbps K, Advanced Mode: WPA/M foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation)			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempor Operating Altitud Direct Power On Start-Up Period Cool Down Period	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, Access Pr 5 - 35 °C <41 - 95 °F> ( 5 - 30 °C <41 - 86 °F> ( 20% - 80% humidity, N 0 - 3,000 m <0 - 9,843 1	54 Mbps 130 Mbps K, Advanced Mode: WPA/M toint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft; v			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempo Operating Altitud Direct Power On Start-Up Period Cool Down Period Air Filter	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature  de 1/ Off	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, ACCESS P 5 - 35 °C <41 - 95 °F> ( 20% - 80% humidity, N 0 - 3,000 m <0 - 9,843 1 Yes About 6 seconds, Warm Instant Off	54 Mbps 130 Mbps K, Advanced Mode: WPAW foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft: v			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempo Operating Altitud Direct Power On Start-Up Period Cool Down Period Air Filter Maintenance Cycle	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature  de 1/Off  od	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, Access P 5 - 35 °C <41 - 95 °F> ( 20% - 80% humidity, N 0 - 3,000 m <0 - 9,843 1 Yes About 6 seconds, Warm Instant Off 6,000 hours / 10,000 ho	54 Mbps 130 Mbps K, Advanced Mode: WPAW foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft: v n-up Period: 30 seconds			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempo Operating Altitud Direct Power On Start-Up Period Cool Down Period Air Filter Maintenance Cycle Power Supply Vo	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature  de 1 / Off  od e (Normal / Eco) *4	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, ACCESS P 5 - 35 °C <41 - 95 °F> ( 20% - 80% humidity, N 0 - 3,000 m <0 - 9,843 1 Yes About 6 seconds, Warm Instant Off	54 Mbps 130 Mbps K, Advanced Mode: WPAW foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft: v n-up Period: 30 seconds			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempo Operating Altitud Direct Power On Start-Up Period Cool Down Period Air Filter Maintenance Cycle Power Supply Vo Power Consump	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature  de 1/Off  od e (Normal / Eco) <sup>4</sup> oltage stion (220 - 240V)	IEEE 802.11b (2.4GHz); IEEE 802.11g (2.4GHz); IEEE 802.11n (2.4GHz); IEEE 802.11n (2.4GHz); Quick Mode: WPA2-PSI Infrastructure, Access P: 5 - 35 °C <41 - 95 °F> ( 20% - 80% humidity, N: 0 - 3,000 m <0 - 9,843 it Yes About 6 seconds, Warm Instant Off 6,000 hours / 10,000 ho	54 Mbps 130 Mbps K, Advanced Mode: WPAW foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft: v n-up Period: 30 seconds			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempo Operating Altitud Direct Power On Start-Up Period Cool Down Period Air Filter Maintenance Cycle Power Supply Vo Power Consump Lamp On (Normal	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature  de 1/Off  od e (Normal / Eco) <sup>4</sup> oltage stion (220 - 240V) / Eco)	IEEE 802.11b (2.4GHz); IEEE 802.11g (2.4GHz); IEEE 802.11n (2.4GHz); IEEE 802.11n (2.4GHz); Quick Mode: WPA2-PSI Infrastructure, Access P: 5 - 35 °C <41 - 95 °F> ( 20% - 80% humidity, N: 0 - 3,000 m <0 - 9,843 i Yes About 6 seconds, Warm Instant Off 6,000 hours / 10,000 hc 100 - 240 V AC ±10%, i	54 Mbps 130 Mbps K, Advanced Mode: WPAW foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft: v n-up Period: 30 seconds			
Wireless Specific Supported Speed Wireless LAN Sect Supported Conne Operating Tempe Operating Altituc Direct Power On Start-Up Period Cool Down Period Air Filter Maintenance Cycle Power Supply Vo Power Consump Lamp On (Normal Standby (Network	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature  de 1/ Off  e (Normal / Eco) <sup>4</sup> oltage stion (220 - 240V) / Eco) On / Off)	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, Access P- 5 - 35 °C <41 - 95 °F> ( (20% - 80% humidity, N) 0 - 3,000 m <0 - 9,843 1 Yes About 6 seconds, Warm Instant Off 6,000 hours / 10,000 hc 100 - 240 V AC ±10%, 1 282W / 203W 2.0W / 0.2W	54 Mbps 130 Mbps K, Advanced Mode: WPAW foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft: v n-up Period: 30 seconds			
Supported Speed Wireless LAN Sec Supported Conne Operating Tempe Operating Altituc Direct Power On Start-Up Period Cool Down Period Air Filter Maintenance Cycle Power Supply Vo Power Consump Lamp On (Normal Standby (Network	cations (Wireless LAN) For Each Mode <sup>3</sup> urity ction Mode erature  de 1/Off  od e (Normal / Eco) <sup>4</sup> oltage stion (220 - 240V) / Eco)	IEEE 802.11b (2.4GHz): IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz): IEEE 802.11n (2.4GHz): Quick Mode: WPA2-PSI Infrastructure, Access P- 5 - 35 °C <41 - 95 °F> ( (20% - 80% humidity, N) 0 - 3,000 m <0 - 9,843 1 Yes About 6 seconds, Warm Instant Off 6,000 hours / 10,000 hc 100 - 240 V AC ±10%, 1 282W / 203W 2.0W / 0.2W	54 Mbps 130 Mbps K, Advanced Mode: WPAW foint (0m / 0ft - 2,286m / 7,500ft) (over 2,286m / 7,500ft) to condensation) ft> (over 1,500m / 4,921ft: v n-up Period: 30 seconds		Approx. 2.4kg	

**Supplied Accessories** 

Power Cable: 1.8m

Computer Cable (VGA Cable): 1.8m

USB Cable: 1.8m

Remote Control: Yes, with Battery AA x 2

Soft Carrying Case Cover for ELPAP10: Yes

#### **Optional Accessories**

Spare Lamp: ELPLP96 Air Filter: ELPAF32 Wireless LAN: ELPAP10 Soft Carrying Case: ELPKS69 Ceiling Mount (White Colour): ELPMB23

EB-X41 / EB-X05 / EB-S41 / EB-S05



©2017 Epson India Pvt. Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited.

EPSON and EXCEED YOUR VISION are registered trademarks of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Information correct as at January 2018

1 Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

- Colour brightness (colour light output) and white brightness (white light output) will vary depending on usage conditions. Colour light output measured in accordance with IDMS 15:4; white light output measured in accordance with ISO 21118.
- Maximum speed and range is achievable when used with same enhanced mode technology. Actual data rates, features and performance may vary depending on your computer system, the environment and other factors
- <sup>14</sup> When used in the general office environment (the amount of floating dust: 0.04 0.2 mg/m³). Based on the Epson's in-house test results

Official Team Partner



Dealer's Stamp





### EPSON INDIA PVT. LTD.

12th Floor, The Millenia, Tower A, No.1, Murphy Road, Ulsoor, Bangalore - 560 008. Tel: 080 4566 5000 Fax: 080 4566 5005

### **Regional Offices:**

Ahmedabad - 3314 8500/01, Chennai - 3967 7500, Cochin - 4012 315, Coimbatore - 98942 19200, Hyderabad - 4857 0032, Jaipur - 78699 11699, Kolkata - 4603 4714/15/29/30, Mumbai - 3079 8200, New Delhi - 3312 0300, Pune - 3028 6000/05





Epson Helpline: For product info or service - 1800 425 0011. For service - 1800 123 001 600 (9AM - 6PM) (Mon - Sat)

Email: emp@eid.epson.co.in